




DSE Series pneumatic tools

Angle

0,8 to 5 NM

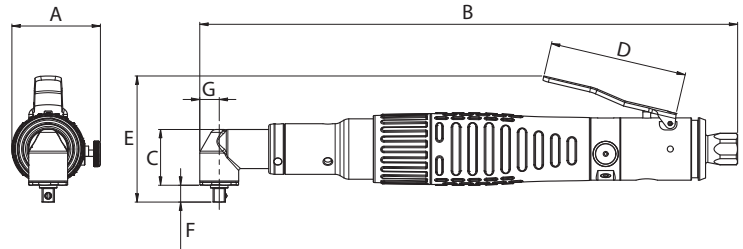

DSE L Angle

Model	Torque (Nm)	Speed (rpm)	Weight (Kg)	A	B	C	D	E	F	G	Code
Lever models											
DSEL-RA30L1400	0,8 - 3	1400	0,70	45,5	276,3	28,7	70,5	64,8	8,6	10	4-1544440
DSEL-RA40L950	0,8 - 4	950	0,70	45,5	276,3	28,7	70,5	64,8	8,6	10	4-1544441
DSEL-RA50L650	0,8 - 5	650	0,70	45,5	276,3	28,7	70,5	64,8	8,6	10	4-1544442

• Noise level 73 dBA • Air consumption 460 L/min • Vibration level <2,5 m/s² • Air hose inner diameter : 6 mm • Air fitting 1/4" gaz
 Standard equipment delivered with the tool : Suspension ring, cover ring for reaction arm, torque setting screwdriver.

Options

For all DSE models

Option	Code
Statistical CAM data	4-7500310
Torque setting	4-7500311