




## DSE Series pneumatic tools

### Straight

0,4 to 12 NM

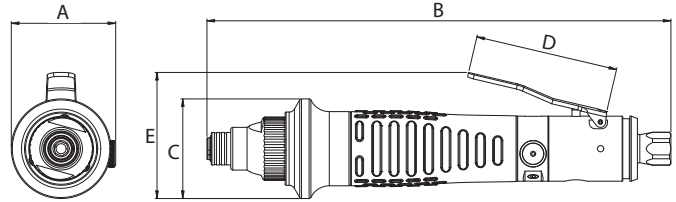


### DSE L Straight

Model	Torque (Nm)	Speed (rpm)	Weight (Kg)	A	B	C	D	E	Code
<b>Push to Start models</b>									
DSEL A35P1400	0,4 - 3,5	1400	0,59	51,4	229,2	49	-	-	4-1588802
DSEL A45P950	0,4 - 4,5	950	0,59	51,4	229,2	49	-	-	4-1588801
DSEL A50P650	0,4 - 5	650	0,59	51,4	229,2	49	-	-	4-1588800
<b>Lever models</b>									
DSEL A35L1400	0,4 - 3,5	1400	0,60	51,4	228,3	49	70,5	62	4-1588805
DSEL A45L950	0,4 - 4,5	950	0,60	51,4	228,3	49	70,5	62	4-1588804
DSEL A50L650	0,4 - 5	650	0,60	51,4	228,3	49	70,5	62	4-1588803

- Noise level 73 dBA
- Air consumption 460 L/min
- Vibration level <2,5 m/s<sup>2</sup>
- Air hose inner diameter : 6 mm
- Air fitting 1/4" gaz

Standard equipment delivered with the tool : Suspension ring, cover ring for reaction arm, torque setting screwdriver.

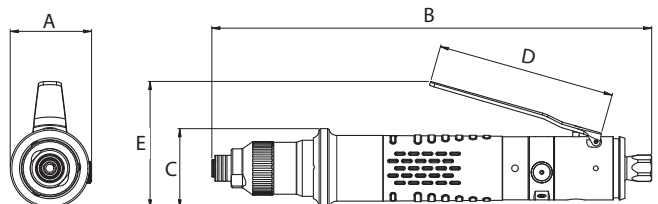

### DSE I Straight

Model	Torque (Nm)	Speed (rpm)	Weight (Kg)	A	B	C	D	E	Code
<b>Push to Start models</b>									
DSEI A40P2000	0,4 - 4	2000	0,80	55,2	251,3	49,6	-	-	4-1588814
DSEI A50P1350	0,4 - 5	1350	0,80	55,2	251,3	49,6	-	-	4-1588813
DSEI A80P1000	3,5 - 8	1000	0,90	54,8	272,2	48,9	-	-	4-1588812
DSEI A95P850	3,5 - 9,5	850	0,90	54,8	272,2	48,9	-	-	4-1588811
DSEI A120P400	3,5 - 12	400	0,90	54,8	272,2	48,9	-	-	4-1588810
<b>Lever models</b>									
DSEI A40L2000	0,4 - 4	2000	0,85	50,5	251,3	49,6	110	77,5	4-1588818
DSEI A50L1350	0,4 - 5	1350	0,85	50,5	251,3	49,6	110	77,5	4-1588820
DSEI A80L1000	3,5 - 8	1000	0,93	50,3	272,2	48,9	110	77,5	4-1588817
DSEI A95L850	3,5 - 9,5	850	0,93	50,3	272,2	48,9	110	77,5	4-1588816
DSEI A120L400	3,5 - 12	400	0,93	50,3	272,2	48,9	110	77,5	4-1588815

- Noise level 73 dBA
- Air consumption 500 L/min
- Vibration level <2,5 m/s<sup>2</sup>
- Air hose inner diameter : 8 mm
- Air fitting 1/4" gaz

Standard equipment delivered with the tool : Suspension ring, cover ring for reaction arm, torque setting screwdriver.